


EST ⚡ 1999

Powerline

POWER DISTRIBUTION TEMPERATURE CONTROL

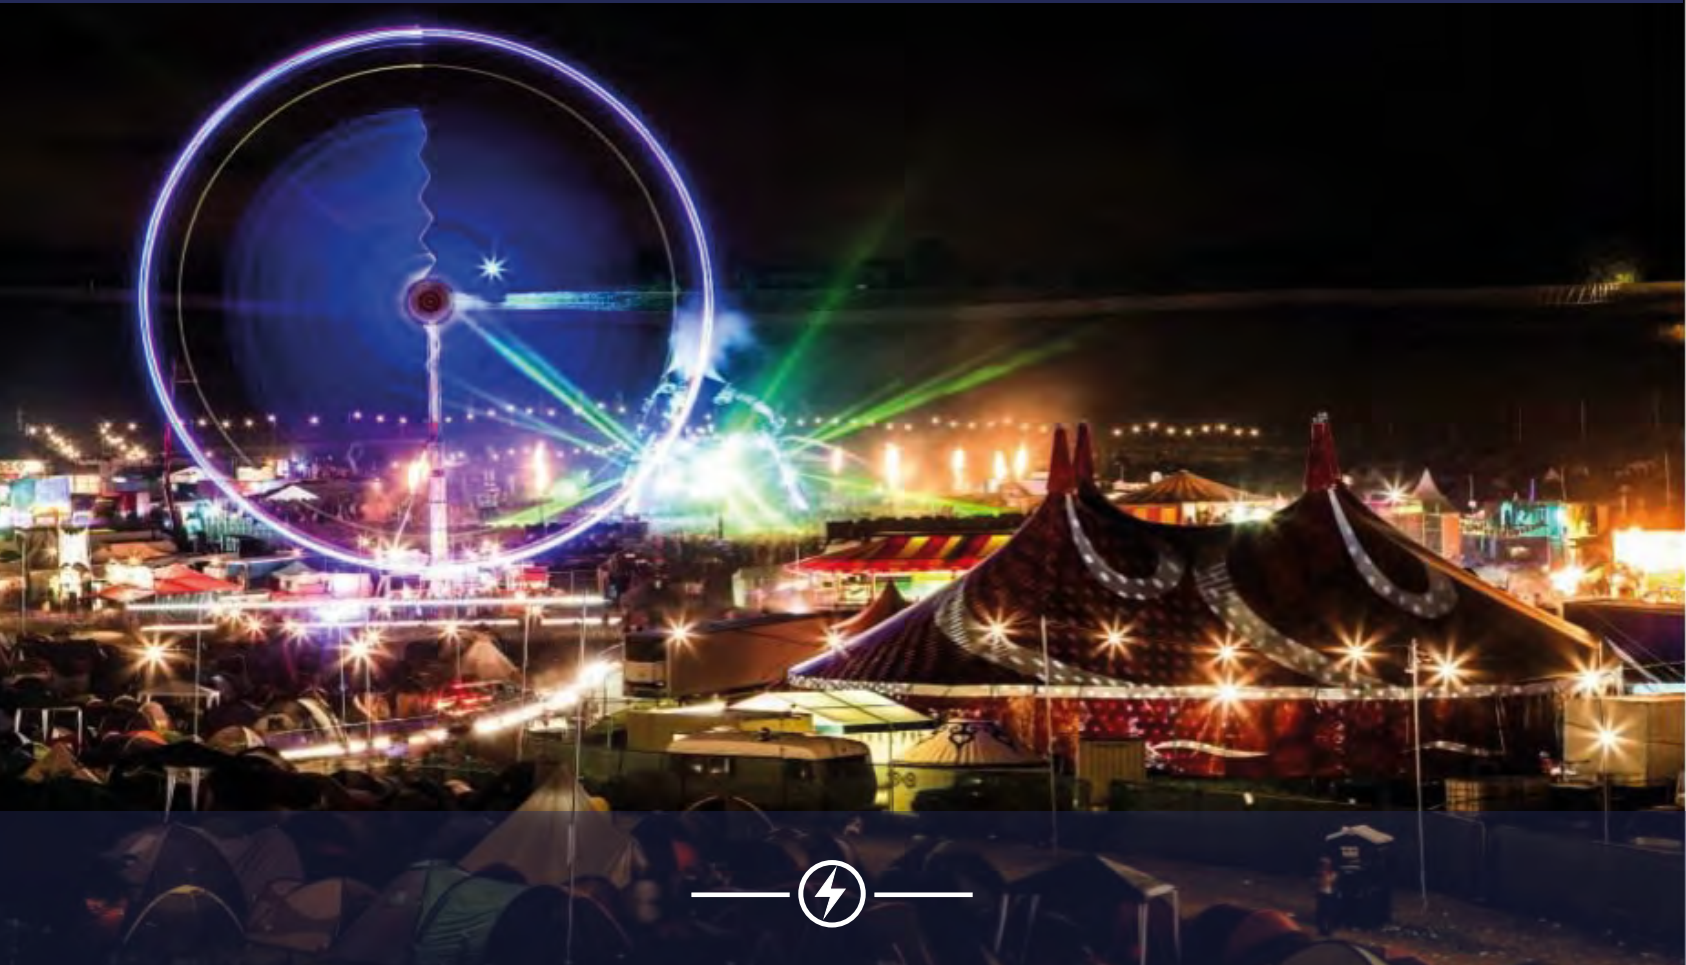

LIGHTING AND STUDIO FX RENTAL GUIDE

Working with you to make your event happen

— www —
THEPOWERLINE.CO.UK



ETC Source 4 Zoom



Incoming Connection	16A Cee Form
Lamp / IP Rating	750W Max HPL - compact tungsten filament lamp - IP Rating IP22
Power Options	575W and 750W
Beam Angle	25° - 50°
Weight (kg)	8.5
Dimensions - Length (mm)	740
Width (mm)	290
Depth (mm)	300
White Light / Colour Temp.	3065K (based on 750W lamp)

Rotating shutter assembly ±25°, with stainless steel shutters. Integral die cast colour frame / accessory holders and top mounted retainer. Slot for glass or stainless steel gobos. Slot with sliding cover for motorised gobo devices or optional iris.

ORDER CODE	LSLS425/50
-------------------	-------------------

ETC S4 19°



Incoming Connection	16A Cee Form
Lamp / IP Rating	750W Max HPL - compact tungsten filament lamp - IP Rating IP22
Power Options	575W and 750W
Beam Angle	19°
Weight (kg)	6.3
Dimensions - Length (mm)	135
Width (mm)	95
Depth (mm)	120
White Light / Colour Temp.	3065K (based on 750W lamp)

Rotating shutter assembly ±25°, with stainless steel shutters. Two accessory slots, and a top mounted, gel frame retainer. Slot for glass or stainless steel gobos. Slot with sliding cover for motorized pattern devices or optional iris. Interchangeable lens barrels permit selection of 5°, 10°, 19°, 26°, 36°, and 50° field angles.

ORDER CODE	LSLS419
-------------------	----------------

Par56 Long Nose



Incoming Connection	16A Cee Form
Lamp / IP Rating	CP available - IP Rating IP20
Wattage	300W
Beam Angle	Narrow to Wide, dependant on lamp Please specify requirement
Weight (kg)	2.5
Dimensions - Length (mm)	410
Width (mm)	265
Depth (mm)	255
White Light / Colour Temp.	2750K

PAR56 light fitting. Supplied with a slide-in gel frame and mounting bracket.

ORDER CODE	LSLP56LN
-------------------	-----------------

Par64 6 lamp bar



Incoming Connection	Socapex
Lamp / IP Rating	CP available - IP Rating IP20
Power Options	6x 500W or 6x 1000W
Beam Angle	Narrow to Wide, dependant on lamp Please specify requirement
Weight (kg)	25
Dimensions - Length (mm)	2300
Width (mm)	265
Depth (mm)	450
White Light / Colour Temp.	2700K at 500W, 3200K at 1000W

6 x Long nose Par64 installed on an internally wired bar with a Socapex inlet.

ORDER CODE	LSLP646X
-------------------	-----------------



Par64 Long Nose



Incoming Connection	16A Cee Form
Lamp / IP Rating	CP available - IP Rating IP20
Power Options	500W and 1000W
Beam Angle	Narrow to Wide, depending on lamp Please specify requirement
Weight (kg)	3
Dimensions - Length (mm)	410
Width (mm)	265
Depth (mm)	255
White Light / Colour Temp.	2700K at 500W, 3200K at 1000W

PAR64 (ParCan), the standard light source for bands and theatre. Supplied with a slide-in gel frame and mounting bracket.

ORDER CODE	LSLP64LN
-------------------	-----------------

Par64 Short Nose



Incoming Connection	16A Cee Form
Lamp / IP Rating	CP available - IP Rating IP20
Power Options	500W and 1000W
Beam Angle	Narrow to Wide, depending on lamp Please specify requirement
Weight (kg)	2.5
Dimensions - Length (mm)	370
Width (mm)	265
Depth (mm)	255
White Light / Colour Temp.	2700K at 500W, 3200K at 1000W

PAR64 Short nose light fitting, supplied with a slide-in gel frame.

ORDER CODE	LSLP64SN
-------------------	-----------------

Par 16 Birdie



Incoming Connection	16A Cee Form
Lamp / IP Rating	GU10 - IP Rating IP20
Power Options	30W and 50W
Beam Angle	30°
Weight (kg)	0.4
Dimensions - Length (mm)	145
Width (mm)	80
Depth (mm)	125
White Light / Colour Temp.	2700K
ORDER CODE	LSLP16B

Par36 Pin Spot



Incoming Connection	16A Cee Form
Lamp / IP Rating	PAR 36 Screw Terminal IP Rating IP20
Wattage	30 W
Beam Angle	15°
Weight (kg)	0.6
Dimensions - Length (mm)	170
Width (mm)	160
Depth (mm)	150
White Light / Colour Temp.	3000K
ORDER CODE	LSLP36



GEKKO Karesslite 100



Incoming Connection	16A Cee Form or 13A Plug at charger
Outgoing Connection	None
Wattage	45W
Beam Angle	50°
White/Colour Temperature	3,200 - 5,600K
Lamp	Multiple LED
IP Rating	IP21
Operating Voltage	10 – 30 VDC
Power Consumption	45W approx.
Power Options	PAG L96e Battery 14.8V 6.5Ah
Weight (kg)	1.1
Dimensions - Length (mm)	310
Width (mm)	55
Depth (mm)	125
ORDER CODE	LSFGK100

Lite Panels LP-1x1 Bi Color



Incoming Connection	16A Cee Form via transformer
Outgoing Connection	None
Wattage	45W
Beam Angle	50°
White/Colour Temperature	3,200 - 5,600K
Lamp	LED
IP Rating	IP21
Operating Voltage	12 – 30 V
Power Consumption	45W approx.
Power Options	13a 230v AC-PSU, Battery LCA LP-100 21.6V 4.4Ah
Weight (kg)	1.36
Dimensions - Length (mm)	405
Width (mm)	350
Depth (mm)	100
ORDER CODE	LSFLP1X1

Arri L7-C



Incoming Connection	16A Cee Form
Outgoing Connection	None
Wattage	220W (max)
Beam Angle	15° - 50° (Half Peak Angle)
White/Colour Temperature	2,800 K - 10,000 K Continuously Variable Correlated Colour Temperature
Lamp	LED
IP Rating	IP20
Operating Voltage	240
Power Consumption	160 W Nominal, 220 W Maximum
Power Options	None
Weight (kg)	11.2
Dimensions - Length (mm)	435
Width (mm)	350
Depth (mm)	315
ORDER CODE	LSFAL7C

ARRI 300 PLUS



Incoming Connection	16A Cee Form
Outgoing Connection	None
Wattage	300W
Beam Angle	14° - 53°
White/Colour Temperature	3200 K
Lamp	CP81
IP Rating	IP20
Operating Voltage	240
Power Consumption	300W
Power Options	None
Weight (kg)	1.8
Dimensions - Length (mm)	233
Width (mm)	187
Depth (mm)	160
ORDER CODE	LSFA300



Studio Due Archiled 300



Incoming Connection	16A Cee Form
Outgoing Connection	16A Cee Form
Wattage	210W
Beam Angle	23°
White/Colour Temperature	Full colour mixing
Lamp	96x 5W high power LEDs
IP Rating	IP54
Operating Voltage	240
Power Consumption	250W
Power Options	None
Weight (kg)	10
Dimensions - Length (mm)	400
Width (mm)	354
Depth (mm)	197
ORDER CODE	LSFAR300

Studio Due Archiled 150/C RGBA



Incoming Connection	16A Cee Form
Outgoing Connection	None
Wattage	90W
Beam Angle	10° & 23° lenses available
White/Colour Temperature	Full colour mixing
Lamp	Multiple RGB LEDs
IP Rating	IP66
Operating Voltage	240
Power Consumption	90W
Power Options	None
Weight (kg)	7.7
Dimensions - Length (mm)	343
Width (mm)	327
Depth (mm)	125
ORDER CODE	LSFAR150

Studio Due Space Flower 3000



Incoming Connection	16A Cee Form
Outgoing Connection	None
Wattage	3200W
Beam Angle	22°
White/Colour Temperature	3,400 K
Lamp	STI 3000 Watt
IP Rating	IP23
Operating Voltage	240
Power Consumption	15A running, 30A at start-up
Power Options	None
Weight (kg)	70
Dimensions - Length (mm)	772
Width (mm)	685
Depth (mm)	450
ORDER CODE	LSFSF3000

Studio Due CityColor 2500



Incoming Connection	16A Cee Form
Outgoing Connection	None
Wattage	2700W
Beam Angle	50° x 52° (50% intensity)
White/Colour Temperature	Full colour mixing
Lamp	2500W Metal Halide
IP Rating	IP54
Operating Voltage	240
Power Consumption	2700W
Power Options	None
Weight (kg)	71
Dimensions - Length (mm)	760
Width (mm)	790
Depth (mm)	580
ORDER CODE	LSFCC2500



Studio Due CityColor 1800



Incoming Connection	16A Cee Form
Outgoing Connection	None
Wattage	2000W
Beam Angle	50° x 52° (50% intensity)
White/Colour Temperature	Full colour mixing
Lamp	1800W Metal Halide
IP Rating	IP54
Operating Voltage	240
Power Consumption	2000W
Power Options	None
Weight (kg)	64.5
Dimensions - Length (mm)	760
Width (mm)	790
Depth (mm)	580
ORDER CODE	LSFCC1800

Par38 Up-lighter



Incoming Connection	16A Cee Form
Outgoing Connection	16A Cee Form
Wattage	60W - 120W
Beam Angle	30°
White/Colour Temperature	3,000 K
Lamp	PAR 38
IP Rating	IP22
Operating Voltage	240
Power Consumption	120W (max.)
Power Options	None
Weight (kg)	5
Dimensions - Length (mm)	295
Width (mm)	150
Depth (mm)	150
ORDER CODE	LSFP38U

Spectral M1500 (Indoor use)



Incoming Connection	PowerCON
Outgoing Connection	PowerCON
Beam Angle	8° - 45°
White/Colour Temperature	Full colour mixing
Lamp	LED
IP Rating	IP20
Operating Voltage	100V-230V
Power Consumption	120W
Power Options	None
Weight (kg)	7
Dimensions - Length (mm)	245
Width (mm)	264
Height (mm)	360
ORDER CODE	LFXSPM1500-I

Spectral M1500 IP66 (Outdoor use)



Incoming Connection	16A Cee Form
Outgoing Connection	16A Cee Form
Beam Angle	8° - 45°
White/Colour Temperature	Full colour mixing
Lamp	LED
IP Rating	IP66
Operating Voltage	100V-230V
Power Consumption	120W
Power Options	None
Weight (kg)	7.6
Dimensions - Length (mm)	295
Width (mm)	150
Depth (mm)	150
ORDER CODE	LFXSPM1500



110cm 5in1 Reflector

Weight (kg)	0.2
Dimensions - Length (mm)	1100
Width (mm)	1100
Depth (mm)	5
Additional Notes	

5 in 1 multi photo reflector disc 43 inches / 110 cm. It comes with silver, gold, black, white and translucent surfaces, as those are the most popular reflectors in photography. It also folds into an easy to carry pouch for added convenience.



ORDER CODE	LSFN110R
------------	-----------------

Avolites Pearl



Weight (Kg)	18
Dimensions - Width (mm)	670
Height (mm)	140
Depth (mm)	480
Additional Notes	

All the power of an Avolites Pearl it offers all the Pearl features including Theatre Playback, time-code, MIDI triggers.

- 2,048 channels to 240 moving lights on 4 isolated DMX outputs
- 10 playback sub-masters, expandable to 15 with external playback wing
- Full personality library in the console, with free updates on website

- Can Save multiple shows instantly to internal USB flash disk or external USB memory stick
- Can Load or Save any Pearl show
- Supplied with colour LCD VGA screen

ORDER CODE	LSFAPLD
------------	----------------